



THE WORLD LEADER IN
FUME EXTRACTION TECHNOLOGY

codice 12240

AD 350

LASER

Last Updated on 29.08.2018



Fume extraction system for light duty laser marking, coding and engraving applications.

BOFA's Advantage 350 fume extraction and filtration system effectively removes potentially harmful fumes and particulates created during the laser marking process. By maintaining a dust-free operating area, the system helps to protect valuable equipment, maintain a higher quality mark, and reduce the number of rejects and contaminants.

The quiet and compact Advantage 350 is ideal for use in light duty laser marking applications, including schools, sign making workshops and small scale industrial environments.

Technology



DeepPleat pre HEPA filter Reverse flow air Advanced carbon Multi voltage ProTECT service filter (RFA) technology filter (ACF) sensing (MVS) unit plan

technology



SureCHECK
quality standard

Key features of the AD 350

Blower with high airflow and pressure Standard

Low cost replacement filters Standard

Filter condition indicator Standard

Low noise levels Standard

Digital flow control system Standard

Nitrogen Dioxide sensor Optional


VOC gas sensor (Volatile Organic Compound)
Optional

Remote stop / start interface Optional







Filter change / system fail signal
Optional

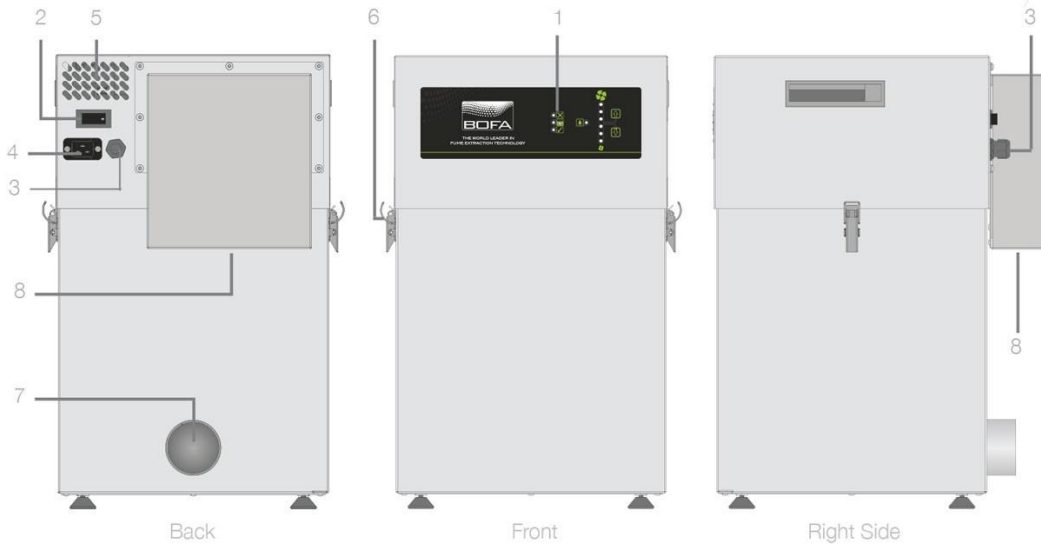
Technical specification

- 1. Filter Condition Display
- 2. On/Off Switch
- 3. Signal / Interface Cable
- 4. Power Cable Inlet
- 5. Motor Cooling Inlet
- 6. Filter Latch
- 7. Hose Inlet Connection - 100mm
- 8. Exhaust Outlet



Airflow through filters

-  Chemical filter
-  HEPA filter
-  Pre filter
-  Clean air
-  Contaminated air
-  Particulate

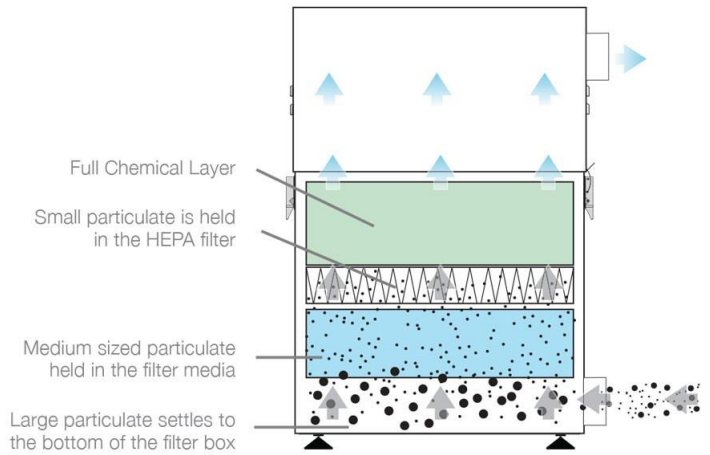

Technical data

	EU	US
Dimensions (HxWxD)	590 x 405 x 465 mm	23.23 x 15.94 x 18.31"
Cabinet construction	Brushed stainless steel / Powder coated mild steel	Brushed stainless steel / Powder coated mild steel
Airflow / pressure	380m ³ /hr / 96mbar	



Electrical aata	115-230v 1ph 50/60Hz Full load current: 12.5 amps / 1.1kw	223cfm / 96mbar
Noise level	< 62dBA (at typical operating speed)	115-230v 1ph 50/60Hz Full load current: 12.5 amps / 1.1kw
Weight	35kg	
Approvals	CE	< 62dBA (at typical operating speed)
		77lbs
		cUL, UL

DeepPleat Pre Filter specifications

Surface Media Area	6m ² approx (64.5 ft ²)
Filter Media	Glass Fibre
Filter Media Construction	100mm DeepPleat construction with Webbing Spacers (0.32ft)
Filter Efficiency	95% @ 0.9 microns

Combined Filter specifications

HEPA Filter Media	Glass Fibre
HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers
Filter Housing	Zintec Mild Steel
Treated Activated Carbon	9kgs (19.8 lbs)
Filter Efficiency	99.997% @ 0.3 microns

Unit part numbers

Model	Voltage	Part No.	24V stop / Start	Filter change / System failure signal	VOC Monitoring
AD 350 powder coated	90 - 257V	L0542A0000	A2001	A2002	A2003
AD 350 with NOx sensor powder coated	90 - 257V	L0542A8212	A2001	A2002	A2003

Replacement filter part numbers

Model	DeepPleat Pre Filter	Combined HEPA / Gas Filter
AD 350	A1030056	A1030055
AD 350 with NOx sensor	A1030056	A1030355

